# **ONR Graduate Traineeship Award Update**

Stephanie Fried 9500 Gilman Drive, MC 0238, La Jolla, CA 92037-0238 phone: (858) 534-1504 fax: (858) 534-7641 email: sefried@ucsd.edu

> Award Number: N00014-07-1-0223 http://mpl.ucsd.edu

### LONG-TERM GOALS

The top-level goal of this project is to examine the physics of ambient noise in the ocean which limits the use of ambient noise correlation techniques. In addition this research should lead the PI to a Ph.D.

### **OBJECTIVES**

Noise correlation processing extracts coherent signals from seemingly random noise data. Although this technique has been successfully used in processing ocean ambient noise data it has severe limitations due to the changing ocean environment and the spactial and temporal variability in sources. In this project we are: (1) investigating the physics of the noise processing procedure that constrains the optimum correlation, (2) attempting to understand where and how the degradation of the derived time domain Green's function (TDGF) comes about, and (3) exploit array and signal processing techniques to optimmize the signal-to-clutter (otherwise known as the 'signal-to-noise') rate of the noise correlation processing.

### **APPROACH**

Using both computer simulations and ambient noise ocean data I have begun looking at the noise correlation processing techniques already in use. The data set used is from the Adaptive Beach Monitoring (ABM) experiment in 1995. The simulation is of the same ocean environment so the comparison between the results is easy.

This work was greatly aided by my advisor, Professor William Kuperman, and Prof. Karim Sabra (formerly of MPL, now at Georgia Tech). Prof. Sabra had previously laid much of the groundwork for this research and allowed me to build upon his suite of noise processing models.

# WORK COMPLETED

During this initial work on this project I began processing of the ABM noise data and set up a computer program to simulate the noise correlation processing. The output of the simulation successfully matched the noise correlation processing of the actual data. In addition I examined the build-up and degradation over time of signal-to-clutter rate for the processed data. This allowed me to determine the optimum correlation time-length for this data, and to begin to examine the physical limitations of the noise correlation process tied with the environment within which the data is taken.

maintaining the data needed, and c including suggestions for reducing	lection of information is estimated to ompleting and reviewing the collect this burden, to Washington Headqu uld be aware that notwithstanding ar DMB control number.	ion of information. Send comments arters Services, Directorate for Information	regarding this burden estimate or rmation Operations and Reports	or any other aspect of th , 1215 Jefferson Davis l	is collection of information, Highway, Suite 1204, Arlington	
1. REPORT DATE SEP 2007		2. REPORT TYPE Annual		3. DATES COVERED <b>00-00-2007 to 00-00-2007</b>		
4. TITLE AND SUBTITLE				5a. CONTRACT NUMBER		
ONR Graduate Traineeship Award Update				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)				5d. PROJECT NUMBER		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) UCSD,9500 Gilman Drive, MC 0238,La Jolla,CA,92037				8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)		
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT						
Approved for public release; distribution unlimited						
13. SUPPLEMENTARY NOTES						
• ~	of this project is to e se correlation techni					
15. SUBJECT TERMS						
16. SECURITY CLASSIFIC		17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON		
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	Same as Report (SAR)	3	ALSI ONSIBLE FERSUN	

**Report Documentation Page** 

Form Approved OMB No. 0704-0188

### **RESULTS**

The initial results for this project show that the noise correlation processing of the data accurately matches a simulation of the same ocean environment.

The optimum time to process the given data was experimentally determined by tracking the signal-to'noise' ratio as successive time increments were added to the correlation processing time. From
examining the noise characteristics at the point where the noise to clutter rate began to degrade we can
correlate this deterioration with a change in the ocean noise field. Figure 1 shows the evolution of the
strength of the strongest noise correlation return over time at increasing distances between
hydrophones. As the distances are ranked only with regard to the distance between hydrophone pairs
and regardless of physical location of individual hydrophones there is some noted variation in optimum
correlation time which reflects the inhomogeneity of the noise field in the local ocean environment.

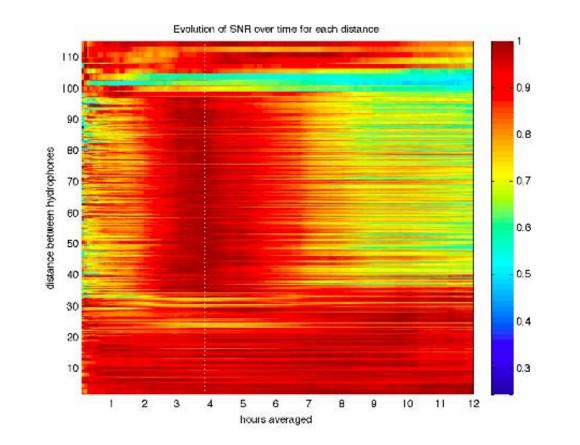


Figure 1: Evolution of the signal-to-clutter over time for increasing distances. This figure shows the evolution and deterioration of the signal-to-clutter rate for each possible distance between hydrophone pairs (y-axis) as increasing time increments (x-axis) are averaged into the noise correlation function. The dotted white line at 3.8 hours shows the average optimal time for correlation over all the distances.

Using the optimum time determined for this data, figure 2 shows the matched noise correlation processing with the simulation for the same ocean environment. Especially significant is that the noise correlation can accurately resolve multiple arrival times and – at least for this case where the noise

environment was dominated by volumetric sources near the hydrophone array – within a scaling factor the strength of these arrivals can be related to the theoretical strength of different travel paths.

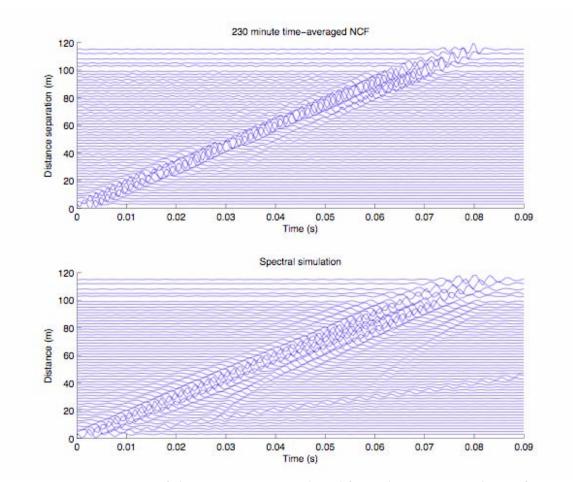


Figure 2: Comparison of the seismogram produced from the noise correlation function (NCF) processing on the ABM data (top plot) with the theoretical of the TDGF in the same environment (bottom plot). The peaks of each trace represent the arrival time (x-axis) for the sound path(s) between the hydrophone pairs at increasing separation distances (y-axis).

### **IMPACT/APPLICATIONS**

Potential future impact for Science and/or Systems Applications is that it finds application for noise, typically rejected and not further used.

## RELATED PROJECTS

This research is related to the ONR 6.1 program "Extracting Coherent Structures from High Frequency Ocean Noise."